


# 30015 VZZ


40 LB. (18KG) CAPACITY  
RIGID-MOUNT WASHER-EXTRACTOR

## SPECIFICATION SHEET


FRONT VIEW

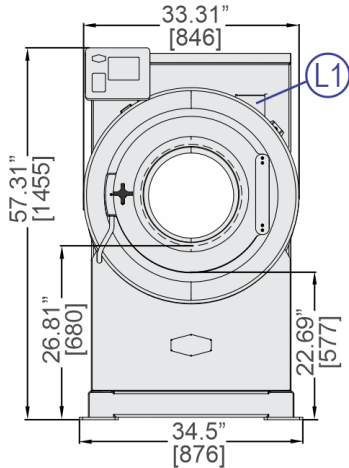


RIGHT SIDE VIEW

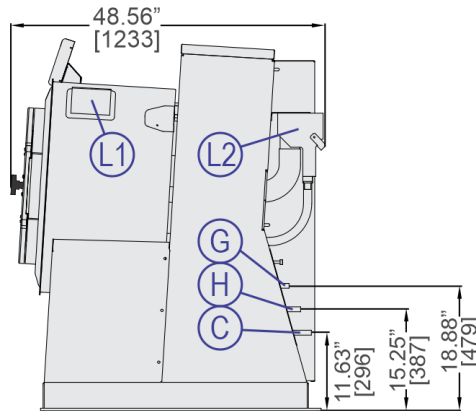


REAR VIEW

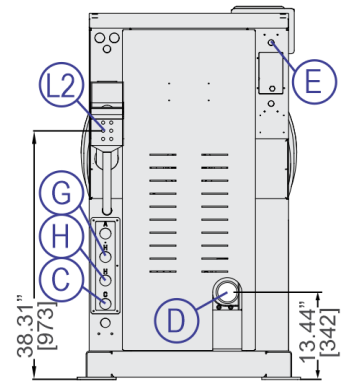

FOUNDATION

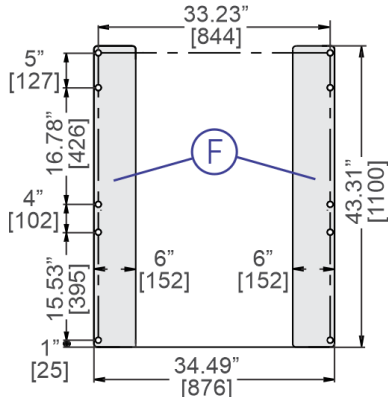

ANCHORING DETAIL

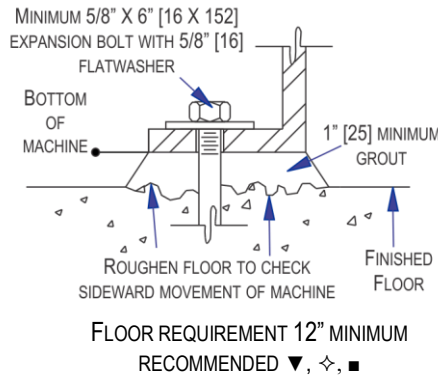

LEGEND

|    |   |
|----|---|
| C  | Cold water inlet, .75" (19 mm) GHT              |
| D  | Drain to sewer, 3" pipe connection              |
| E  | Electrical connection                           |
| F  | Foundation pads                                 |
| G  | Hot water (chemical flushing), .75" (19 mm) GHT |
| H  | Hot water inlet, .75" (19 mm) GHT               |
| L1 | Standard soap chute                             |
| L2 | Liquid supply inlets                            |

### MECHANICAL SPECIFICATIONS

|  |  |
|--|--|
| Capacity – lb. (kg)                                      | 40 (18)                                  |
| Cylinder Diameter x Depth – in. (mm)                     | 30 x 15 (762 x 381)                      |
| Door Opening – in. (mm)                                  | 15.5 (394)                               |
| Cylinder Volume – cu. ft. (L)                            | 6.14 (174)                               |
| Machine Dimensions (W x D x H) – in. (mm)                | 34.5 x 48.62 x 57.29 (876 x 1234 x 1455) |
| Shipping Dimensions (W x D x H) – in. (mm)               | 40 x 64 x 63 (1016x1625x1600)            |
| Motor – HP (kW)  | 5 (3.72)                                 |
| Wash Speeds – RPM  | 30-46                                    |
| Distribution Speed – RPM                                 | 99                                       |
| Extraction Speeds – RPM                                  | 200-970                                  |
| Extraction G-Force                                       | 400                                      |
| Static Weight – lb. (kg) ◇                               | 1144 (519)                               |
| Max. Dynamic Load RMS – lb. (kg) ◇                       | 2168 (983)                               |
| Frequency (Hz)   | 16.2                                     |
| Water Pressure <sup>(Required)</sup> – psi (bar)         | 10-75 (.68-5.1)                          |
| Water Valve Cv Rating at 72°F (22°C)                     | 5.8 (22)                                 |
| Minimum Recommended Distance Between Machines – in. (mm) | 6 (152)                                  |

### ELECTRICAL SPECIFICATIONS

| Voltage       | Running Amps | Fuse (Amps) | Circuit Breaker (Amps) |
|---------------|--------------|-------------|------------------------|
| 220/3/50-60   | 7            | FRN20       | 20                     |
| 208, 240/1/60 | 9, 8         | FRN20       | 20                     |
| 208, 240/3/60 | 8, 7         | FRN20       | 20                     |
| 380/3/50-60   | 4.5          | FRS15       | 15                     |
| 415/3/50      | 4.5          | FRS15       | 15                     |
| 480/3/60      | 3.5          | FRS15       | 15                     |

See Fuse and Wire Size manual MAEFUSE 1BE for safety information. Contact factory for electrical specifications if equipped with Electric Heat option. Contact factory for single phase availability.

▼ See dimensional drawing for complete details.

◇ It is the sole responsibility of the owner/user to assure that the floor and/or any other supporting structure exceeds not only all applicable building codes, but also that the floor and/or any other supporting structure for each washer-extractor or group of washer-extractors has sufficient strength and rigidity (i.e., a natural or resonant frequency many times greater than the rotational machine speed with a reasonable factor of safety) to support the weight of all the fully loaded machine(s) including the weight of the water and goods, and including the published 360° rotating sinusoidal RMS forces that are transmitted by the machine(s). Contact the factory for additional machine data for use by a structural engineer.

■ Machine bases made from concrete should either be part of a monolithic pour or should be tied into foundation and not isolated from existing floor.



# 30015 VZZ

40 LB. (18KG) CAPACITY

RIGID-MOUNT WASHER-EXTRACTOR

## SPECIFICATION SHEET

### Standard Features:

- RinSave® water saving technology
- 7 speeds (2 wash, 1 distribution, 1 RinSave, 3 extract)
- MilTouch™ touch screen controller
- Single-motor inverter drive
- Tall, lifting ribs
- Tapered roller bearings
- High M.A.F. (Mechanical Action Factor)
- Large cylinder perforations
- Fresh-water flushing chemical manifold
- Auto tension V-belt drive
- Six (6) liquid chemical injection ports
- Control is configurable to display your choice of language
- 5-year limited warranty on frame, cylinder & shell



### Optional Features:

- Steam
- 3 compartment flushing supply injector
- Prison package

### Why Purchase Milnor?


- RinSave® water saver in conjunction with large cylinder perforations provides more efficient rinsing. **BENEFIT: Saves water, energy, and time.**
- Larger cylinder volume than most competitive similar sized washer-extractors provides *greater productivity*. More linen washed per day, or fewer hours required to process. **BENEFIT: Saves labor.**
- Faster process times reduce fabric wear, promoting *longer linen life!* **BENEFIT: Saves linen replacement costs.**
- High perforated ribs provide excellent lifting. **BENEFIT: Greater mechanical action leads to better wash quality.**
- 400-G high extract provides excellent moisture removal. Lower extract speeds are available for uniforms, delicate textiles and blended fabrics. **BENEFIT: Better extraction saves dryer fuel.**
- MilTouch™ touch screen control, utilizing resistive touch screen technology and full VGA resolution, has a clear and informative display which shows current machine status info including total formula time and time elapsed. Formulas can be developed on a PC, saved to USB external memory and uploaded with a screen touch. Controller also provides intuitive fault diagnosis and relevant troubleshooting suggestions. **BENEFIT: Fewer operator errors.**
- Superior product support through local, highly-skilled dealers. **BENEFIT: Faster repairs mean less downtime.**



Safe chemical injection



Superior cylinder design



Solid industrial frame

Contact Milnor for your local, authorized dealer:

Pellerin Milnor Corporation  
P.O. Box 400 • Kenner, LA 70063  
t: 504-467-9591 • f: 504-468-3094

