
GE APPLIANCES

COMMERCIAL LAUNDRY

COMMERCIAL STACK MULTIPAY COMBO WASHER DRYER
VFW310SSRWW Washer- VFD31EDSRWW/ VFD31GDSRWW Dryer





WIRELESS ENABLED ELECTRONIC CONTROLS



- Eliminate the hassle of coins with the easiest, smartest, built-in wireless QR code laundry payment system
- Launderday™ User App. Offers customers contactless payment and cycle notifications for a modern laundry experience. No dongles, harnessing or subscriptions required!*

SMARTHQ MANAGEMENT OWNERS DASHBOARD™



- Included with all Wireless enabled electronic controls
- Features a centralized cloud based app for managing site revenues, machine status, pricing activities and refund requests*



MULTIPAY




- Payment flexibility allows for optional acceptance of coin payment, built-in QR payment or both.
- Purchase our optional coinbox, single coindrop for stand alone or dual coindrop for stacking configurations, or install your own payment system via coindrop emulation

MODULARITY



- Modular product line means less product to stock.
- No stocking multiple stack or payment system specific SKU's
- Stack, unstack, change money acceptance at or after purchase, anytime

COMMERCIAL GRADE COMPONENTS



- Enjoy lasting performance from built-to-last parts, including a fully front serviceable galvanized steel cabinets, cast counterweights, HD bearings and suspension, 1/2 horsepower motor.

SERVICE PRIORITY & PARTS PROMISE



- Receive timely response from our dedicated service team
- Most common repair components are available to be shipped in as soon as one business day


SECURITY IS OUR PRIORITY



- We prioritize protecting your appliance and data through every stage of development, manufacturing, and maintenance

MICROBAN® ANTIMICROBIAL TECHNOLOGY

- Blue components indicate MICROBAN® Antimicrobial technology is built into critical areas of this ultrafresh commercial washer- dryer, including buttons, control panel, door handle, dispenser and lint filter





5 YEAR PARTS WARRANTY

- Enjoy peace of mind thanks to a comprehensive 5-year parts warranty

* A reliable WiFi network and owner registration are required for pay per use operation. see: https://www.geappliances.com/commercial-laundry-registration, Registration & Set Up

GE APPLIANCES

COMMERCIAL LAUNDRY

VFW310SSRWW GE® Commercial 3.5 cu. ft. ADA Front Load Washer

Multipay with Built-In App-Based Payment System

CIRCUIT REQUIREMENTS: An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or a time-delay fuse, is required.

WASHER NOTE: Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.


INSTALLATION INFORMATION: Before installing, consult installation instructions and see: Registration & Set Up. A reliable WiFi network is required to accept pay per use. The new GE laundry product must be registered by the owner at: https://www.geappliances.com/commercial-laundry-registration or scanning the below QR code:

SPECIFICATIONS		
Model		VFW310SSRWW
Control Type		Electronic Push Button, LED Display
Wifi		Built In
Cycles		4
Wash Time		29 minutes
Payment Options		OPL, App, Coindrop***
Stack Options	To create stack order one of the SKU's to the right	VFD31EDSRWW Electric VFD31GDSRWW Gas
Capacity-	lb (kg)	22 (9.98)
Cylinder Volume	cu ft	3.5
Cylinder Diameter	In (mm)	21-13/16" (554 mm)
Wash Speed	RPM	50
Spin Speed (G Force)	RPM (G)	1050 (306)
Motor Size-	HP (kW)	1.35 (.99)
Water Consumption/ Cycle	Gallons (l)	23.18 (87.75)
*WF (Water Factor)	Gal/ft³/cycle (liters/cycle/litre)	4
*MEF (Modified Energy Factor)	ft³/kWh/cycle (Liters/kWh/cycle)	2.2
*Remaining Moisture Content (RMC)	%	33.9
Water Temp Settings		Automatic
Electrical Requirements	(v/Hz/Ph-Amp)	120/60/1
Required Water Pressure	p.s.i. (bar)	20-120 (1.4/8.3)
Drain Pump Type		Electric 120V
Max Drain Height		96"
Drum Finish		Stainless Steel
Net Weight	Lbs (kg)	313 (141.97)
Shipping Weight	Lbs (kg)	322 (146.05)
Shipping Dimensions In (cm)	Height Width Depth	43.3 (109.98) 30.5 (77.5) 33 (83.8)
Warranty	Limited	5 Year Parts
Dimenstions are for planning purposes only. For complete information see the intallation instructions packed with the product. *From: APPLIANCE & EQUIPMENT STANDARDS PROGRAM | CCMS		
*** Third party payment via coindrop emulation. Approved vendors are ESD/ Greenwald, Kiosoft, PayRange, see money acceptance cross reference		



43.2 H x 27 W x 30.1 D

Integrated diagnostics through SmartHQ Service

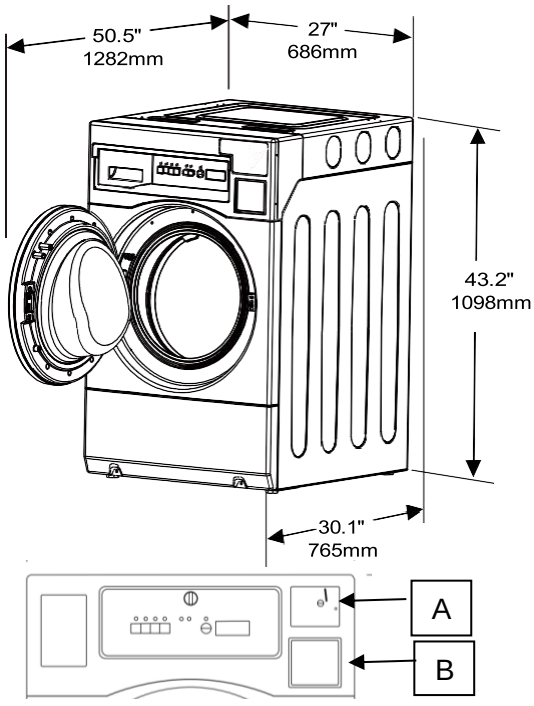

A	VFA31SCDT	GE SINGLE COIN DROP (STAND ALONE)
A	VFA31DCDT	GE DUAL COIN DROP (STACK)
B	VKAUNICBT	GE UNIVERSAL COIN BOX

ENERGY STAR

ADA COMPLIANT

Security Capabilities Verified GOLD

inlet hoses included

Listed by Underwriters Laboratories

COMMERCIAL STACK MULTIPAY COMBINATION SPECIFICATIONS revised 5/23/2025

GE APPLIANCES

COMMERCIAL LAUNDRY

VFD31EDSRWW-VFD31GDSRWW GE® Commercial 7.7 cu. ft Electric/ Gas Stack Dryer

Multipay with Built-In App-Based Payment System

NOTE: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

INSTALLATION INFORMATION: Before installing, consult installation instructions, see: Registration & Set Up. A reliable WiFi network is required to accept pay per use. The new GE laundry product must be registered by the owner at: https://www.geappliances.com/commercial-laundry-registration or scanning the below QR code:


SPECIFICATIONS

Model Number		VFD31EDSRWW- electric VFD31GDSRWW- gas
Control Type		Electronic Push Button
Wifi		Built In
Cycles		6
Dry Time		40 min
Payment Options		OPL, App, Coindrop***
Stack Options	These dryers stack over the SKU's to the right:	VFW310SSRWW Washer VFD31ESSRWW Electric Dryer VFD31GSSRWW Gas Dryer
Exhaust Options / max length (ft)		3-Way (Rear; Left; Bottom) 120
VFD31EDSRWW Electric Heater	Watts	5600-240V, 4400-208V
VFD31GDSRWW Gas Burner	BTU/hr	22000 Natural gas
Motor	HP (kW)	1/3 (.25)
ELECTRICAL/ GAS REQUIREMENTS		
VFD31EDSRWW	(V/Hz/Ph-Amp)	240-208/60/1-30
VFD31GDSRWW	(V/Hz/Ph-Amp)	120/60/1-15
Gas Inlet Size		3/8" NPT
Drum volume (Capacity)	cu. ft. (liters)	7.4 (210)
Drum Finish/ Material		Stainless Steel
Net Weight	Lbs (kg)	163 (73.9) elect 167 (75.7) gas
Shipping Weight	Lbs (kg)	172 (78) elect 176 (79.8) gas
Shipping Dimensions	Height	46.85 (119)
In (cm)	Width	30.47 (77.4)
	Depth	35.04 (89)
Warranty	Limited	5 Year Parts
Dimenstions are for planning purposes only. For complete information see the intallation instructions packed with the product. LP Conversion Kit # WE25X37797		
*** Third party payment via coindrop emulation. Approved vendors are ESD/ Greenwald, Kiosoft, PayRange, see money acceptance cross reference		

Integrated diagnostics via SmartHQ Service

85.6" H x 27" W x 32.3" D

NOTE: These dryers must be stacked over VFW310SSRWW Washer, VFD31ESSRWW Electric Dryer or VFD31GSSRWW Gas Dryer

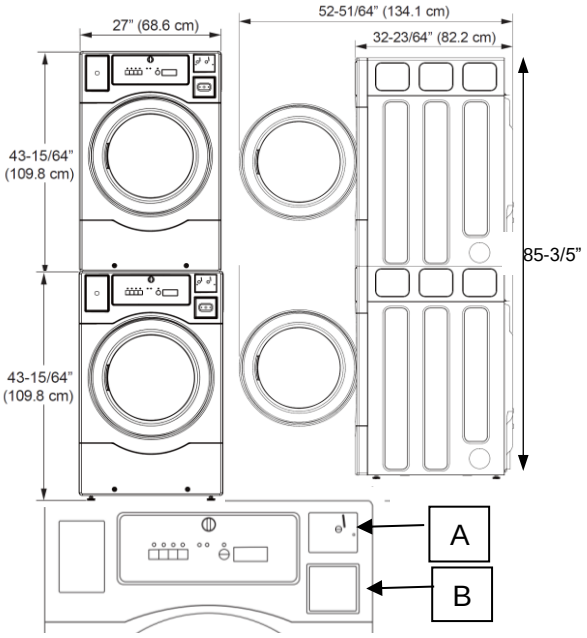

INSTALLED IN LOWER POCKET ONLY***		
A	VFA31SCDT	GE SINGLE COIN DROP (STAND ALONE)
A	VFA31DCDT	GE DUAL COIN DROP (STACK)
B	VKAUNICBT	GE UNIVERSAL COIN BOX

FOR COMPLETE INFORMATION, SEE INSTALLATION INSTRUCTIONS PACKED WITH YOUR DRYER.


DUCTING MATERIALS:

For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If rigid metal duct cannot be used, then UL-listed flexible metal (semirigid) ducting can be used (Kit WX08X10077). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL-listed flexible metal (foil-type) duct may be used ONLY in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instruction packed with your dryer for complete instructions when using flexible metal (foil type) ducting.

EXHAUST LENGTH CALCULATION:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow. Dryers **must** be exhausted to the outside.

CAUTION: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard. Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

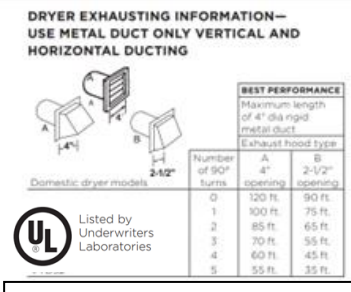

For every extra 90° elbow, reduce the allowable vent system length by 10 ft. Two 45° elbows will be treated like one 90° elbow. For the side exhaust installations, add one 90° elbow to the chart. When calculating the sum vent system length, you must add all the straight portions and elbows of the system (including the transition duct.