GE APPLIANCES

COMMERCIAL LAUNDRY

COMMERCIAL DRYER ADA MULTIPAY VFD31ESSRWW-VFD31GSSRWW



WIRELESS ENABLED ELECTRONIC CONTROLS



- Eliminate the hassle of coins with the easiest, smartest, built-in wireless QR code laundry payment system
- Launderday™ User App. Offers customers contactless payment and cycle notifications for a modern laundry experience. No dongles, harnessing or subscriptions



SMARTHQ MANAGEMENT OWNERS DASHBOARD™

- Included with all Wireless enabled electronic controls
- Features a centralized cloud based app for managing site revenues, machine status, pricing activities and refund requests*

MULTIPAY



- Payment flexibility allows for optional acceptance of coin payment, built-in QR payment or both.
- Purchase our optional coinbox, single coindrop for stand alone or dual coindrop for stacking configurations, or install your own payment system via coindrop emulation




MODULARITY



- Modular product line means less product to stock.
- No stocking multiple stack or payment system specific SKU's
- Stack, unstack, change money acceptance at or after purchase, anytime

MICROBAN® PROTECTION

- Blue components indicate MICROBAN® Antimicrobial technology is built into critical areas of this ultrafresh commercial dryer including the control panel, lint filter and door handle



SECURITY IS OUR PRIORITY

- We prioritize protecting your appliance and data through every stage of development, manufacturing, and maintenance

5 YEAR PARTS WARRANTY

- Enjoy peace of mind thanks to a comprehensive 5-year parts warranty

SERVICE PRIORITY & PARTS PROMISE



- Receive timely response from our dedicated service team
- Most common repair components are available to be shipped in as soon as one business day



COMMERCIAL GRADE COMPONENTS

- Enjoy lasting performance from built-to-last commercial laundry parts, including a fully front serviceable galvanized steel cabinet, digital controls, 1/2 horsepower motor, stainless steel drum

* A reliable WiFi network and owner registration are required for pay per use operation. see: https://www.geappliances.com/commercial-laundry-registration, Registration & Set Up

GE APPLIANCES

COMMERCIAL LAUNDRY

VFD31ESSRWW-VFD31GSSRWW GE® Commercial 7.7 cu. ft AD Electric/ Gas Dryer

Multipay with Built-In App-Based Payment System

NOTE: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

INSTALLATION INFORMATION: Before installing, consult installation instructions, see: Registration & Set Up. A reliable WiFi network is required to accept pay per use. The new GE laundry product must be registered by the owner at: https://www.geappliances.com/commercial-laundry-registration or scanning the below QR code:


SPECIFICATIONS

Model Number		VFD31ESSRWW- electric VFD31GSSRWW- gas
Control Type		Electronic Push Button
Wifi		Built In
Cycles		6
Dry Time		40 min
Payment Options		OPL, App, Coindrop***
Stack Options	To create a stack order one of the stack SKU's to the right:	VFD31EDSRWW Electric VFD31GDSRWW Gas
Exhaust Options / max length (ft)		3-Way (Rear; Left; Bottom) 120
VFD31ESSRWW Electric Heater	Watts	5600-240V, 4400-208V
VFD31GSSRWW Gas Burner	BTU/hr	22000 Natural gas
Motor	HP (kW)	1/3 (.25)
ELECTRICAL/ GAS REQUIREMENTS		
VFD31ESSRWW	(V/Hz/Ph-Amp)	240-208/60/1-30
VFD31GSSRWW	(V/Hz/Ph-Amp)	120/60/1-15
Gas Inlet Size		3/8" NPT
Drum volume (Capacity)	cu. ft. (liters)	7.7 (210)
Drum Finish/ Material		Stainless Steel
Net Weight	Lbs (kg)	163 (73.9) elect 167 (75.7) gas
Shipping Weight	Lbs (kg)	172 (78) elect 176 (79.8) gas
Shipping Dimensions	Height	46.85 (119)
In (cm)	Width	30.47 (77.4)
	Depth	35.04 (89)
Warranty	Limited	5 Year Parts
Dimenstions are for planning purposes only. For complete information see the intallation instructions packed with the product. LP Conversion kit #WE25X37797		
*** Third party payment via coindrop emulation. Approved vendors are ESD/ Greenwald, Kiosoft, PayRange, see money acceptance cross reference		

43.2" H x 27" W x 32.3" D


NOTE: These dryers must be stacked over VFW310SSRWW Washer, VFD31ESSRWW Electric Dryer or VFD31GSSRWW Gas Dryer

Integrated diagnostics through SmartHQ Service

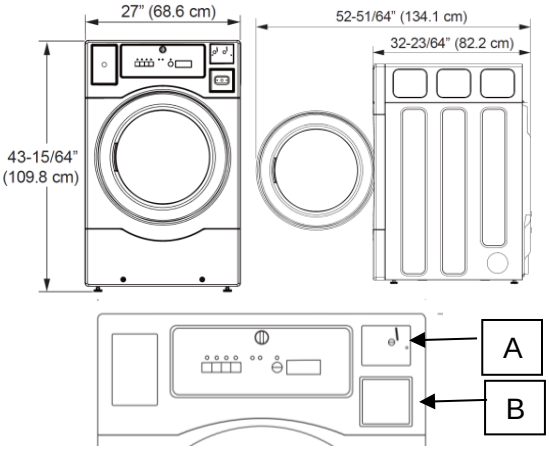

INSTALLED IN LOWER POCKET ONLY***		
A	VFA31SCDT	GE SINGLE COIN DROP (STAND ALONE)
A	VFA31DCDT	GE DUAL COIN DROP (STACK)
B	VKAUNICBT	GE UNIVERSAL COIN BOX

DRYER EXHAUSTING INFORMATION— USE METAL DUCT ONLY VERTICAL AND HORIZONTAL DUCTING



For every extra 90° elbow, reduce the allowable vent system length by 10 ft. Two 45° elbows will be treated like one 90° elbow. For the side exhaust installations, add one 90° elbow to the chart. When calculating the sum vent system length, you must add all the straight portions and elbows of the system (including the transition duct.

FOR COMPLETE INFORMATION, SEE INSTALLATION INSTRUCTIONS PACKED WITH YOUR DRYER.

DUCTING MATERIALS:

For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If rigid metal duct cannot be used, then UL-listed flexible metal (semirigid) ducting can be used (Kit WX08X10077). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL-listed flexible metal (foil-type) duct may be used ONLY in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instruction packed with your dryer for complete instructions when using flexible metal (foil type) ducting.

EXHAUST LENGTH CALCULATION:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow. Dryers **must** be exhausted to the outside.

CAUTION: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard. Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

Listed by Underwriters Laboratories

ADA COMPLIANT